

HSF



ROHS

SPECIFICATION

Current Rating:	0.75Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator:	PA6T UL 94V-0 Black

Ordering Code:

FHAM01 - X - X - D - X - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No:

② No. of Contacts
02 To 100

③ Contact Plating:

G0: Gold flash S0: Selective
G1: 3u" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin

④ Connector Type
D: Dual

⑤ Plastic High:

H: 3.1

Please mark the desired length in the H

⑥ Insulator Material

B: PA6T

C: LCP

E: PA9T

⑦ Packing:

A: Tray

B: Bag

T: Tube

U: Tube+CAP



R: Tape&Reel

W: Tape&Reel+CAP



⑧ With locating pegs option

A: Type A without pegs


B: Type b with pegs

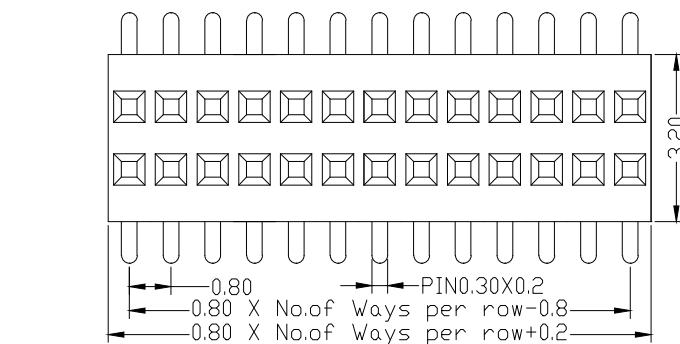

TYPE A

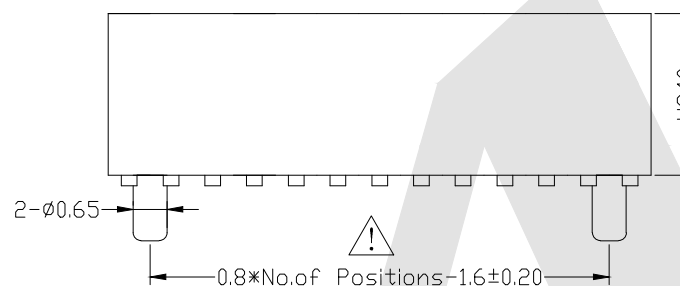

TYPE B

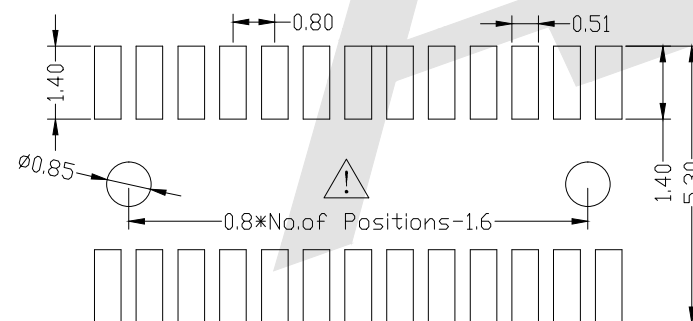


PCB LAYOUT

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:
As Shown
DRAW
YG ZHONG
CHECK
BobYang

UNIT:
mm
DATE
01/10/2016
DATE
01/10/2016



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

0.8mm Female Header Dual Row SMT Type

DRAWING NO: FHAM01-XXDXXXX

PRODUCT NO: FHAM01-XXDXXXX



Add Size

2021/06/10

DESCRIPTION

DATE

REV

1

2

3

4

5

6

7

8